




دیتاشیت کلید چنچ اور سکومک


کلید های چنج اور ساده

MTS3P/4P100~3200A

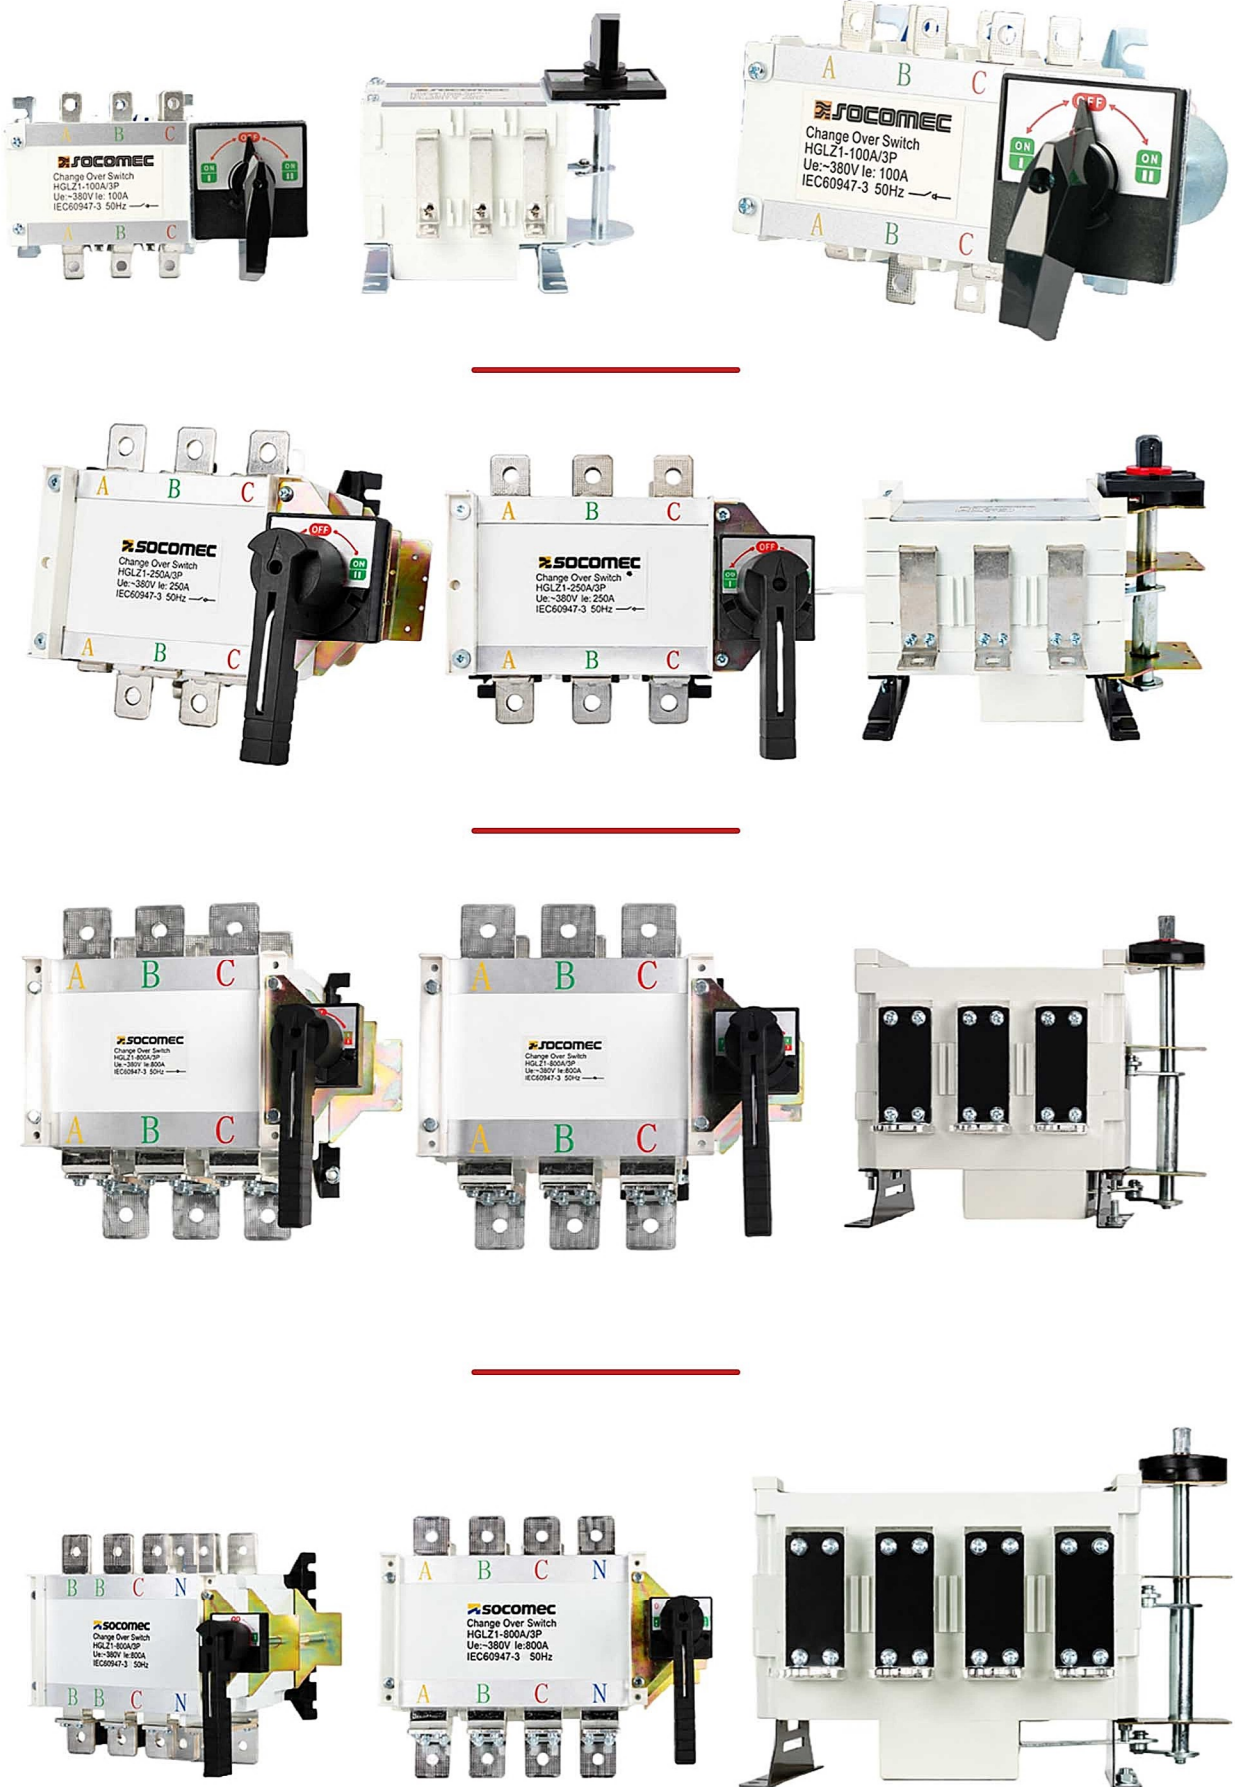


(Overall Dimensions - 3P & 4P)

Spec.	Overall and installation dimension																	
100~800A	A	B	C	D	D1	E	J	J1	K	L	P	R	S	T	U	ΦX	Y	Y1
100A/3	190	108	157	57	134	119	111	176	84	7	30	13	18	2.5	101	6	40	93
100A/4	209	108	157	89	134	119	122	188	84	7	30	13	18	2.5	101	6	40	93
160A/3	270	145	227	76	197	172	122	195	101	7	36	20	23	3	125	9	56	125
160A/4	300	145	227	104	197	172	156	225	101	7	50	20	23	3	125	9	56	125
250A/3	315	177	227	88	197	172	165	233	130	7	50	25	30	3	151	11	56	130
250A/4	347	177	227	138	197	172	215	286	130	9	65	25	30	3	151	11	56	130
400A/3	410	246	297	125	264	240	217	297	173	9	65	32	38	5	214	11	83	186
400A/4	470	246	297	180	264	240	217	357	173	9	65	32	38	5	214	11	83	186
630A/3	410	265	297	125	264	240	217	297	173	9	65	40	48	5	225	13	83	186
630A/4	470	265	297	180	264	240	217	357	173	9	65	40	48	5	225	13	83	186
800A/3	410	288	297	125	264	240	217	297	173	9	65	45	53	6	262	13	83	186
800A/4	470	288	297	180	264	240	217	357	173	9	65	45	53	6	262	13	83	186

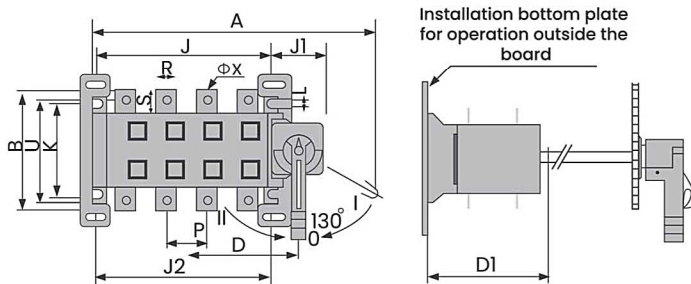



Operation outside 100~1600A board

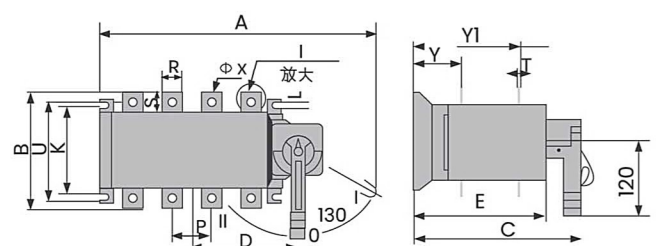

Direct operation of 100~1600A


(Installation & Mounting Dimensions)

Spec.	Dimension of bottom board				
100~1600A	I	M	Z	W	Q
125A	55	6.5	95	216	244
160A	55	6.5	95	216	244
200A	55	6.5	116	216	244
250A	55	6.5	116	216	244
315-400A	60	8.5	180	280	311
630A	60	8.5	180	280	311
1600A	60	8.5	180	280	311

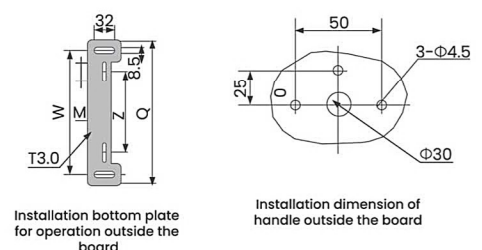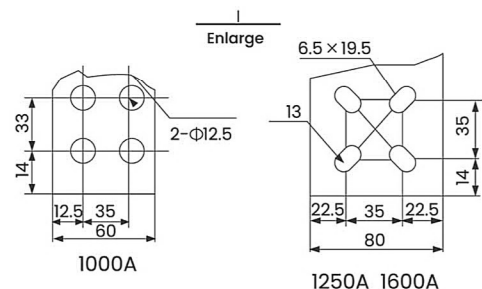


نقشه‌های نصب، ابعاد فرمان و الگوی سوراخ‌کاری (2000A الی 3200A)


(Installation Diagrams & Terminal Drilling Patterns)

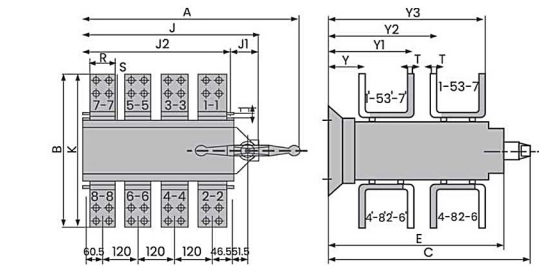


Direct operation in front face of 2000~2500A

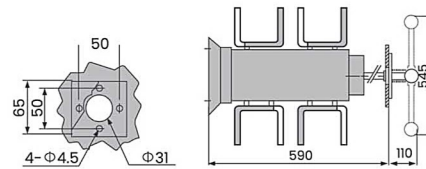


Operation outside 2000~2500A board





2000A

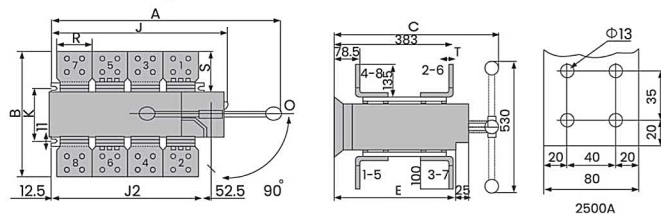

Direct operation on front face of 3150A



Locking the cabinet face with the lock



3150A

نقشه‌های نصب، ابعاد فرمان و الگوی سوراخ‌کاری (3200A الی 2000A)

(Installation Diagrams & Terminal Drilling Patterns)

Spec.	Overall and installation dimension																			
1000~3200A	A	B	C	D	D1	E	J	J1	J2	K	L	P	R	S	T	ΦX	Y	Y1	Y2	Y3
1000A/3	485	353	374	150	322	294	355	459	0	220	11	120	60	64.5	8	13	108	240	0	0
1000A/4	599	353	374	270	322	294	475	579	0	220	11	120	60	64.5	8	13	108	240	0	0
1250A/3	485	365	374	150	322	294	355	459	0	220	11	120	80	68	8	13	108	240	0	0
1250A/4	599	365	374	270	322	294	475	579	0	220	11	120	80	68	8	13	108	240	0	0
1600A/3	485	365	374	150	322	294	355	459	0	220	11	120	80	68	10	13	110	242	0	0
1600A/4	599	365	374	270	322	294	475	579	0	220	11	120	80	68	10	13	110	242	0	0
2000A/3	485	405	560	150	508	484	347	85	459	220	0	120	80	76	10	13	105	192	317	405
2000A/4	599	405	560	270	508	484	464	85	579	220	0	120	80	76	10	13	105	192	317	405
2500A/3	485	427	560	150	508	484	347	85	459	220	0	120	80	80	15	13	98	198	314	414
2500A/4	599	427	560	270	508	484	464	85	579	220	0	120	80	80	15	13	98	198	314	414
3200A/3	485	447	560	150	508	484	347	85	459	220	0	120	120	95	15	13	98	205	314	420
3200A/4	599	447	560	270	508	484	464	85	579	220	0	120	120	95	15	13	98	205	314	420

کلید های چنج اور موتوردار







ATS3P/4P100~3200A



ابعاد جامع، نقشه‌های نصب و الگوی شمش‌کشی (2000A-3200A)


Comprehensive Dimensions, Installation Layouts & Terminal Drilling (2000A-3200A)

Spec.	Total Size							Switch installatoin					Connecting terminal				
2000~3200A	A	A1	B	B1	C	E	G	J	N	R	S	T	W	Y	Y1	Y2	Y3
2000A/3	680	525	383	254	480	467	447	498	84.5	80	65	10	204.5	105	87	125	88
2000A/4	800	646	383	254	480	467	447	618	84.5	80	65	10	204.5	105	87	125	88
2500A/3	680	525	401	254	480	467	447	498	84.5	80	67	12	204.5	98	100	116	100
2500A/4	800	646	401	254	480	467	447	618	84.5	80	67	12	204.5	98	100	116	100
3200A/3	680	525	398	254	480	467	447	498	84.5	80	65	15	204.5	98	107	109	106
3200A/4	800	646	398	254	480	467	447	618	84.5	80	65	15	204.5	98	107	106	106

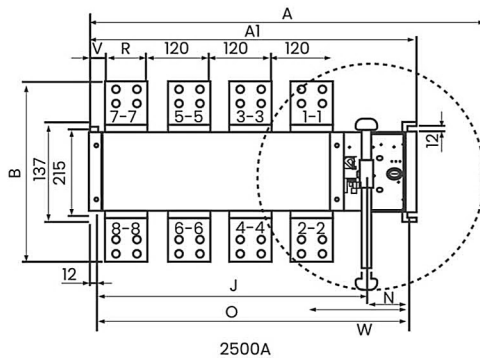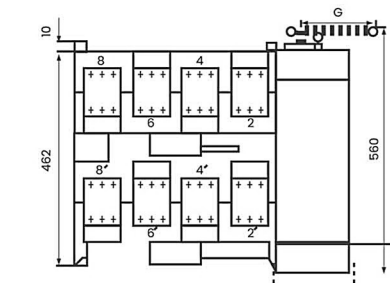

دیاگرام سیم‌کشی پنج اور

Wiring Diagram

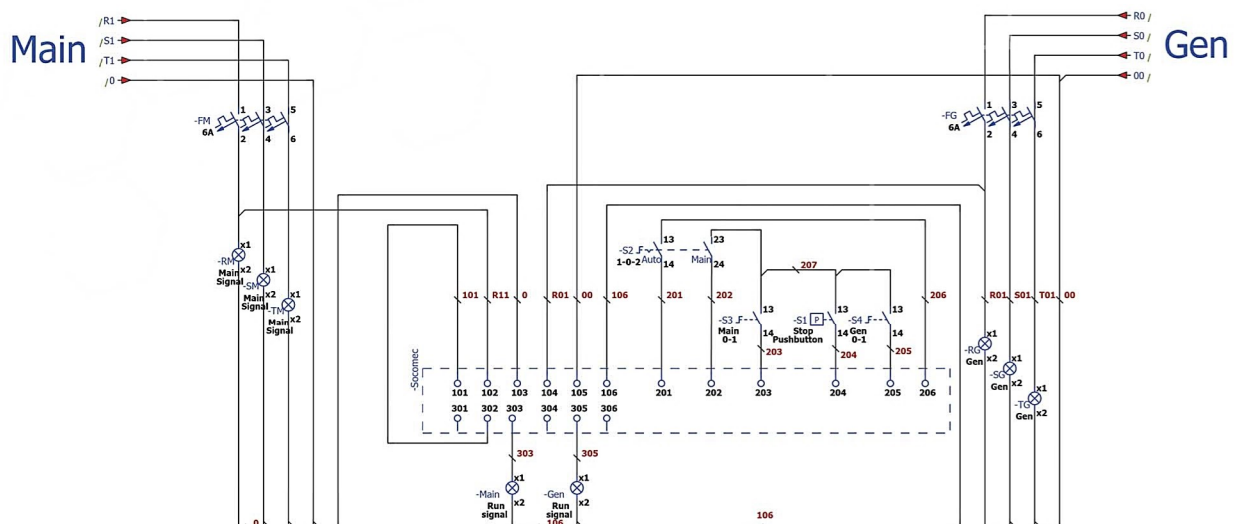

istatajhiz



ELECTRICITY AND AUTOMATION ARE OUR SPECIALITY

دفتر مرکزی :

تهران، خیابان لاله زار جنوبی، مجتمع تجاری فراز، طبقه 1 ، واحد 62

شماره تماس :

02133988304 - 02133988303