

BE 2005 Industrial Pt100 Sensor

Protection tube

Construction	Closed-end tube
Material	SS. 304
Insertion length "L" in mm	Customer to specify
Insertion dia "D" in mm	Customer to specify
Extension length "X" in mm	Customer to specify
Extension dia "d" in mm	Customer to specify
Process connection	1/2" NPT

Connection head

Model	KN
Material	Cast aluminum
Protection Class	Typical IP65
Cable entry	M16x1.5 - IP68

Sensor


Type	S" Single Pt100 / "D" Duplex Pt100"
Accuracy	According IEC 751 Class B
Connection	3 Wire System (Optional 4 Wire System)
Range	-50 ~ +400 °C

Option

Connection head	DN, DP, KP, BP
Sensor class	A, 1/3B
Process connection	Other connection specify
Protection tube material	SS. 316

Ordering code

Model	BE 2005 -						
Sensor (S or D)							
Insertion diameter "D" in mm							
Insertion length "L" in mm							
Extension diameter "d" in mm							
Extension length "X" in mm							
Special option specify by customer							

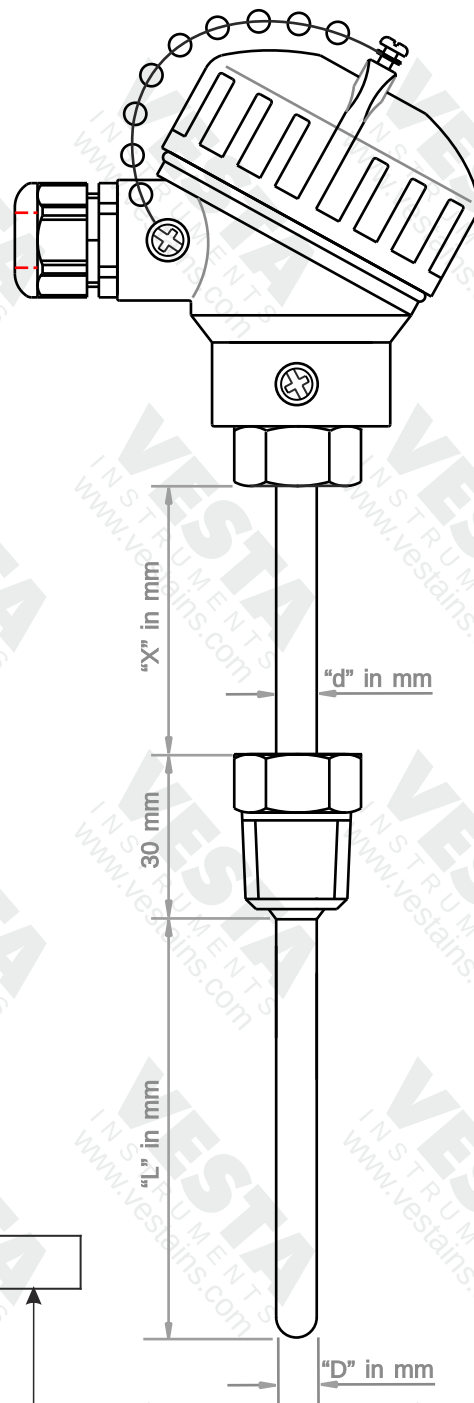

ISO 9001:2008



VESTA
INSTRUMENTS
www.vestains.com