

SE 1055 General Purpose Thermocouple

protection tube

Construction	Closed-end tube
Material	SS. 304
Insertion length "L" in mm	Customer to specify
Outside diameter "D" in mm	Customer to specify
Process connection	1/2" NPT

Lead Wire

Material	"P" for PVC Insulated "T" for Teflon Insulated "G" for Glass fiber Insulated "S" for silicon insulated
Length "X" in mm	Standard 2meters (Other length specify)

Element


Calibration	K, J, E
For duplex	KK, JJ, EE
Accuracyy	According IEC 584-1 / DIN 43710

Option

Process connection	Other connection specify
Protection tube material	SS. 316

Ordering code

Model	SE 1055 -					
Calibration						
Outside diameter "D" in mm						
Insertion length "L" in mm						
Lead wire material						
Special option specify by customer						

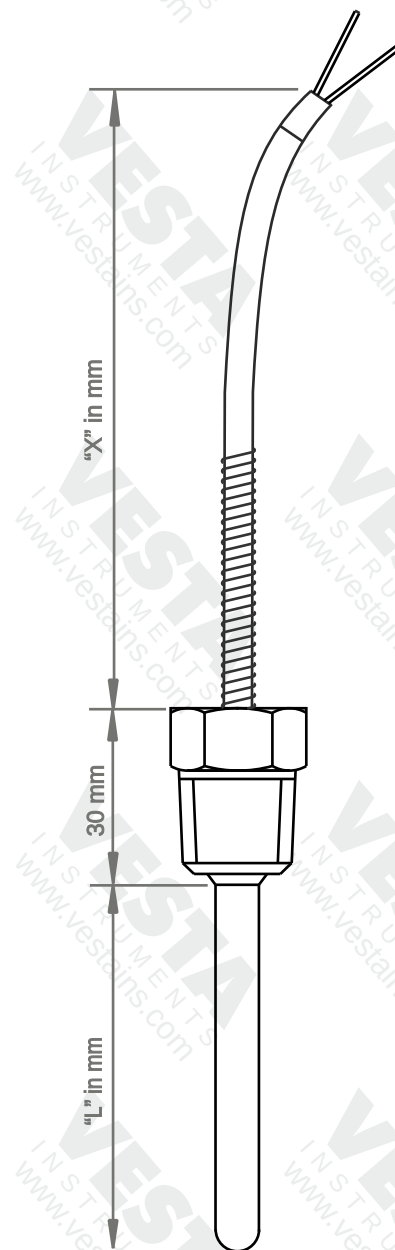

ISO 9001:2008



VESTA
INSTRUMENTS
www.vestains.com