


K25011T		
Product		Cell Switch
Serial		K Series
Contact		2NO+1NC
Connection Type		with Terminal
Current	**Ie**	2 A (250V AC)
Usage Category		AC15
Mechanical Life (Min Qty)		1000000
Electrical Life (Min Qty)		100000
Operating Frequency (On-Off/Hour)		Mech. 3000 Elec. 1200
Insulation Voltage (Ui)		300 V
Impulse Withstand Voltage (Uimp)		2.5 kV
Dielectric Strength (Body-Contact)		2.500V AC
Dielectric Strength (Contact-Contact)		1.500V AC
Isolation Resistance		10 MΩ min. (500V DC)
Operating Temperature		-25 / +80 °C
Pollution Degree		3
Protection Degree		IP20
Contact Material		AgNi
Cable Section		Terminal 6,3*0,8 mm
		1 kA
Specifications	V0 material	
Standards / Certificates	TS EN 60947-5-1	



Devre Şeması

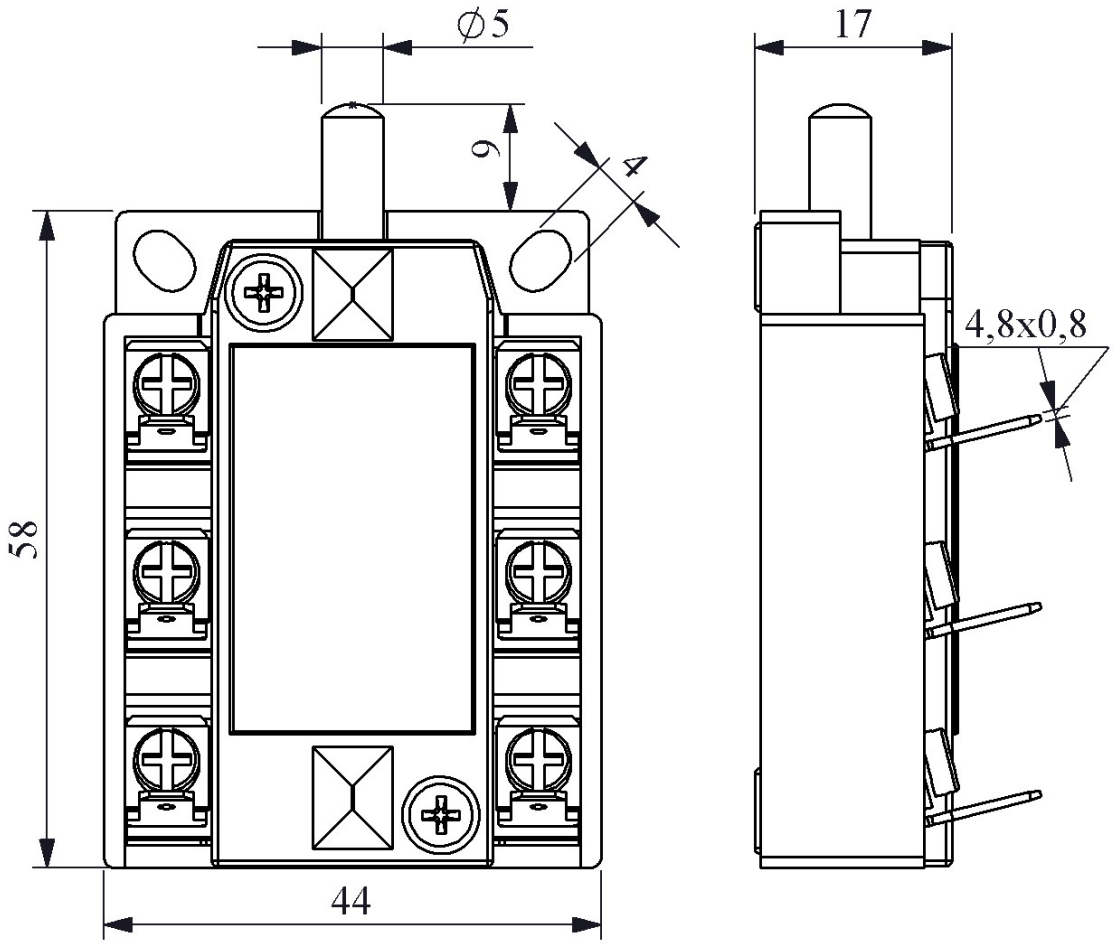